

inch 1 2 3 4 5 6 7

广州格林韦圣木业有限公司
Guangzhou Greenvills Wooden Products Co., Ltd.
广州番禺南涌镇沙头角路1111号2楼
29B2, Decoration Materials Market, Zhongshan, Panyu, Guangzhou, 511495 China
Tel: 86-20-34609373 23630630
Fax: 86-20-34609352
Email: sales@greenfloor.com sales@flooringchina.net
http://www.gfloor.com www.flooringchina.net



cm 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20

咏树

——乔伊斯·基尔默

我永远不会说：
我想能够变成一棵树。

和嘴饥渴地渴求大地
和腹内涌动的乳汁如蜜。
树水一天天和露水上升，
为孩童举起清凉的乳臂。

树的尖刺里也许藏上了
夏日中知悉的几部羽翼。
一点会像风叶地摇曳，
一滴清雨水与蜂蜜交叠。
做诗约个个像我是森林，
树木只能是上帝的创作。

Trees

——by Joyce Kilmer

I think that I shall never see
A poem lovely as a tree.
A tree whose hungry mouth is pressed
Against the earth's sweet flowing breast.

A tree that looks at God all day
And lifts her leafy arms to pray.

A tree that may in Summer wear
A nest of robins in her hair.

Upon whose bosom snow has lain
Who intimately lives with rain.

Poems are made by fools like me,
But only God can make a tree.

当你打开这本目录，恭喜你已经在“中国最专业的地板出口商之一”对店！

Congratulations to you when you open this catalog, because you are communicating with one of the most professional Chinese flooring exporters.





07 多层地板 Engineered Flooring	09 窄板三层地板 3-Ply Wood Flooring	12 三层全橡木地板 3-ply All Oak Flooring	13 实木地板 Hardwood Flooring
16 体育地板 Sports Wooden Flooring	17 多拼地板 Fusible Engineered Flooring	18 细齿地板 Sawtooth Engineered Flooring	19 大宽齿地板 Large-tooth Engineered Flooring
20 火烧地板 Fumed Engineered Flooring (Fumed oak/bleached)	21 烟熏地板&碳化地板 Smoked & Carbonized Oak Flooring	23 人字拼地板 Herringbone Flooring	24 曲线地板 Curved Engineered Flooring
25 木石地板 Stone Veneer Wood Flooring	28 户外实木菠萝地板 Moruya Decking	29 户外橡木碳化地板 OAK DECKING(carbonized)	30 户外松木碳化地板 PINE DECKING(carbonized)
31 户外巴劳地板 Bau Decking	33 户外刺槐地板 Black Locust Decking	34 木线条 Wood Moulding	35 拼花地板 Art Parquet Flooring
目录 CATALOGUE		41 实木马赛克 Solid Wood Mosaic	49 竹地板 Bamboo Flooring
		62 地毯 Underlay	



多层地板

Engineered Flooring

Engineered wood flooring is composed of two or more layers of wood in the form of a plank. The top layer (lamella) is the wood that is visible when the flooring is installed and is adhered to the core.

The increased stability of engineered wood is achieved by running each layer at a 90° angle to the layer above. This stability makes it a universal product that can be installed over all types of subfloors above, below or on grade.

Engineered wood is nowadays the most common type of wood flooring used globally.

WHITE OAK-1

Size:

1200RL X 125 X 12/15mm
1mm,2mm,3mm wear layer

Joint:

Tongue&groove, Click-lock

Common Sizes:

- 1) 1200 X 125 X 12mm (2mm,3mm top lamella)
- 2) (400-1200) X 165 X 9.5mm (1.5mm top lamella)
- 3) 490/600 X 70 X 10mm (3mm,4mm top lamella)
- 4) 600/900 X 90 X 10mm (3mm,4mm top lamella)
- 5) 600-1200 X 120 X 10mm (3mm,4mm top lamella)
- 6) 1860 X 148/189 X 15/14mm (3mm, 4mm top lamella)





常规三层地板

3-Ply Wood Flooring

The parquet's 3-ply construction with grains running in different directions reduces the natural swelling and shrinking of the wood by up to 70%. Compared to solid wood floors, 3 ply or multilayer parquet is also the better choice in terms of sustainability, eco-friendliness, and price-performance ratio.



3-ply 2 strip & 3 strip Size:

2200 X 189 X 14(3)mm,
2200 X 189 X 15(4)mm,

3-ply 1 strip Size:

1860 X 189 X 14(3)mm,
1860 X 189 X 15(4)mm,

Grade:

AB, ABC, ABCD, CD

Wood species:

Oak, beech, maple, jatoba, walnut, teak,
sapele, iroko, doussie, merbau, kempas, etc

Joint:

Tongue&groove, Click-lock;



Size:

1860 X 148 X 15/4mm
1860 X 189 X 15/4mm
1900 X 190 X 18/6mm

Structure:

3 ply all solid oak

Wood species:


White Oak

Joint:

Tongue&groove


Advantage:

Complete hardwood 100%, more stable
structure and more choices on big sizes,
higher quality, etc



三层全橡木地板 3-ply All Oak Flooring

It is made from 3 layers of oak, cross grain glued by high frequency gluing machines which optimises the use of the prime grade material whilst ensuring the smaller off-cuts are re-used to make the middle and lower layers.

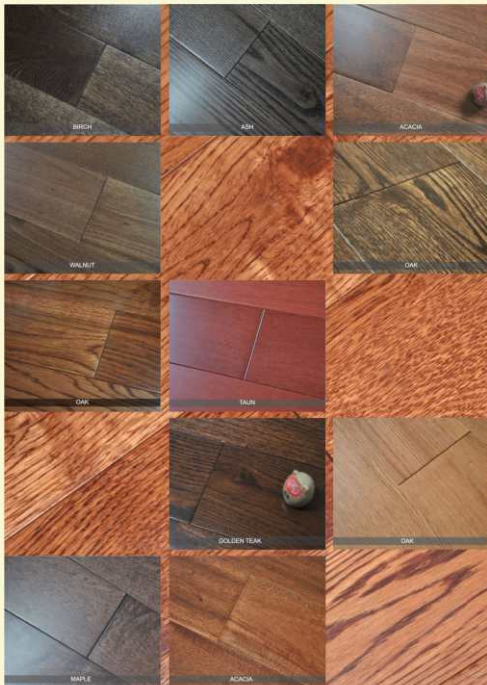

实木地板 Hardwood Flooring

Size:

Random lengthx93x18mm

Random lengthx90x18mm

Random lengthx125x18mm

Hardwood flooring is being used by many people to create a warm atmosphere in their home and to increase its value.

Hardwood floors are made of planks milled from a single piece of timber.

With the increased use of concrete as a subfloor in some parts of the world engineered wood flooring has gained some popularity however in areas where homes traditionally have full basements solid wood floors are still common.

Name:

Solid Burma Teak Flooring

Size:

410-910 X 123 X 18mm
(Indonesian teak is also available)

体育地板

Sports Wooden Flooring



Size:

1800/2400 X 60 X 22mm

Wood species:


Maple, oak, ash, etc.

Joint:

Tongue&groove

Application:

Very suitable for gymnasiums and athletic facilities of all types.

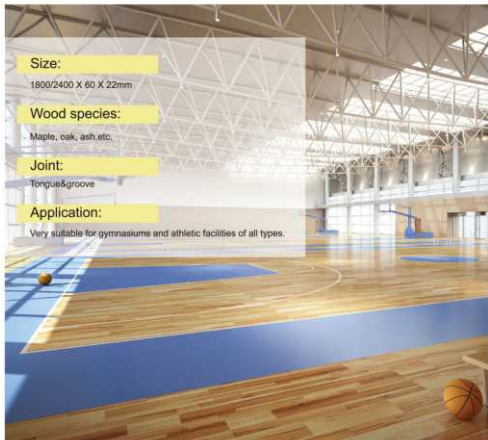

多拼地板

Fineline Engineered Flooring

Consisting of narrower fine strips of Oak (natural or smoked) or other wood species, it offers an attractive effect on spacious or urban rooms.

It's well suited for vibrant spaces where intense feelings accompany modern rhythms.

Size:

1860 X 189 X 15mm, 4mm wear layer

1860 X 189 X 14mm, 3mm wear layer



锯路地板

Serated Engineered Flooring



Size:

1860 X 189 X 15/4mm

1860 X 189 X 14/3mm

Serrated Oak Flooring, also called saw line flooring or saw mark flooring, presenting a country old aesthetic look with many saw cuts on its surface. It's unique, and has its special characteristics, namely, scars of wounds strung together like beads.

大规格地板

Larger-sized Engineered Flooring

Description:

Larger-sized Wood Flooring's biggest advantage is adopting maximum dimensional lumber and creates elegant, graceful and exquisite look for your house. It's more suitable to apply for lobby, parlour, saloon, reception house, etc bigger sized rooms.



Size:

1900 X 190 X 15/4mm
2200 X 220 X 15/4mm
2200 X 240 X 20/6mm
2200 X 260 X 20/6mm
2200 X 300 X 20/6mm
3660 X 340 X 20/6mm

Wood Species:

White oak

Joint:

Tongue&groove

Surface treatment:

Color stained, handscrapped, brushed, limed, smoked, carbonized, serated or more effects are workable



火烧地板

Flamed Engineered Flooring (volcano collection)

Size:

1900 X 190 X 15/4mm
1900 X 190 X 20/6mm

Wood species:

White oak

Description:

A volcano is an opening, or rupture, in the surface or crust of the Earth or a planetary mass object, which allows hot lava, volcanic ash and gases to escape from the magma chamber below the surface.

Flamed engineered wood flooring is also named Volcano Collection for its unique look and resembling craftwork.

The natural wood surface is baked attentively and manually by experienced artisan using fire-spraying kit.

gold powder
washed



烟熏地板&碳化地板

Smoked & Carbonized Oak Flooring

Size:

1860 X 189 X 14/3mm
1900 X 190 X 15/4mm
1900 X 190 X 20/6mm

Smoked Oak Flooring:

Smoking refers to the natural oxidation/ageing process of the oak timber, where the boards are fumed or 'smoked' for three days with ammonia vapour. This vapour chemically reacts with the tannin in the oak and causes it to deepen in colour to a level that the oak would otherwise reach naturally over 20-30 years.

The advantage of smoking is that it achieves a natural colour which permeates all the way through the 4mm or 6 mm wear layer. The smoking also gives the boards an attractive tonal variation from pale to mid tone plus veining within individual boards.



Size:

1860 X 189 X 14/3mm
1900 X 190 X 15/4mm
1900 X 190 X 20/6mm

Carbonized Oak Flooring:

Carbonizing refers to the floor of a high temperature water treatment in an oxygen free environment. The oak wear lamella is carbonized and dried by micro molecular technology and the internal migration of the wood fiber gradually facilitates the formation of highly integrated wood fiber hole.

The advantage of carbonizing is that the wood fiber is highly integrated, waterproof and fungus free, and no expansion caused by heat and contraction caused by cold after removing the timber's internal stress.



Photos are taken from View Pender Place project in Vancouver

人字拼地板

Herringbone Flooring



Herringbone floors, with their wood blocks meet point to point creating a continuous zig-zag, have rich history as a traditional floor pattern in the world. It can be installed in several configurations like single, double diagonal or Chevron.

Comparing with common single or double installation, chevron herringbone is more prominent in many prestigious European Chateaus while Diagonal installation visually expands the room, but requires more material - add at least 15% extra.

Size:

490 X 70 X 10(3)mm
300 X 70 X 15(3)mm
450 X 75 X 15(2)mm
600 X 125 X 12(2)mm
450 X 83 X 18mm (hardwood)

Joint:

Tongue&groove

Available wood species:

Oak, iroko, doussie, teak, walnut, sapele, jatoba, maple, elm, merbau, birch and many more




WENGE

WALNUT

曲线地板

Curved Engineered Flooring

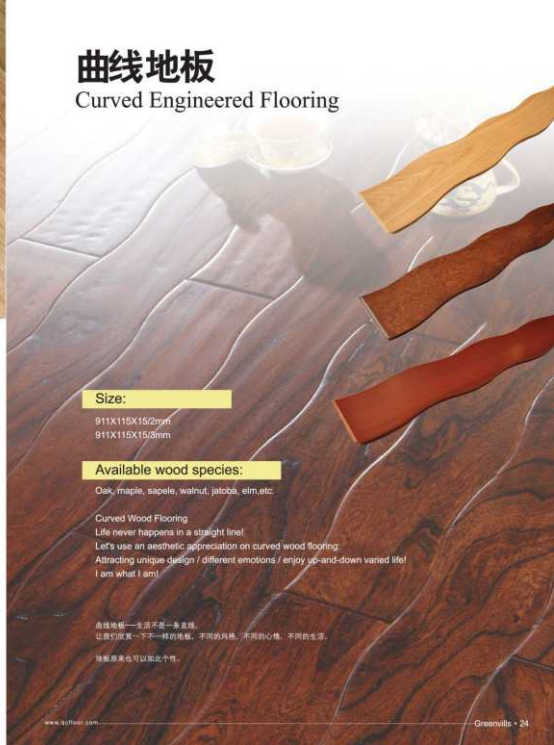

Size:

911X115X15/2mm
911X115X15/3mm

Available wood species:

Oak, maple, sapele, walnut, jatoba, elm, etc.

Curved Wood Flooring

Life never happens in a straight line!

Let's use an aesthetic appreciation on curved wood flooring:

Attracting unique design / different emotions / enjoy up-and-down varied life!
I am what I am!

曲线地板——生活不是一条直线。

让我们欣赏一下不一样的地板，不同的风格，不同的心情，不同的生活。

地板原来也可以如此个性。

木石地板

Stone Based Wood Flooring



Fireproof Wood Flooring is made of MGO board and natural wood veneer. It's the perfect combination of fire-proof material with the elegance of natural real wood.

It's non combustible and can achieve fire ratings as high as 3 hours given the correct installation.

It can be used for sound studios, schools, public areas, movie theatres, train partition, bus partition, boat partition, shopping centres and any area where the fireproof function is imperative.

Size:

1210x125x17/2mm,3mm

1830x193x17/2mm,3mm


Available wood species:

Oak, cherry, ash, jatoba, sapele, walnut, teak, maple, elm, etc.

Physical specification(MGO board): (test values are as per 10mm thickness)

Test Item	Technical index	Test Value	Test Result
Density(km3)	$1.0 < \rho \leq 1.2$	1.1	PASS
Moisture Content(%)	≤ 8	6	PASS
Flexural Strength(MPa)	≥ 10	12	PASS
Impact Strength(kJ/m ²)	≥ 2.8	2.8	PASS
Nail-Holding Ability(N/mm)	≥ 20	48	PASS
Dry shrinkage rate(%)	0.3	0.2	PASS
Bulking factor(%)	0.8	0.4	PASS
Anti halogen	No condensation	No condensation	PASS
Chloride ion content(%)	≤ 10	7	PASS



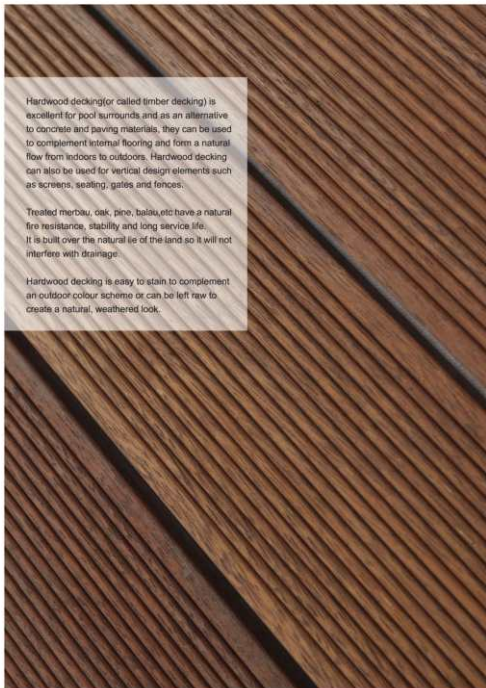

Hardwood decking (or called timber decking) is excellent for pool surrounds and as an alternative to concrete and paving materials, they can be used to complement internal flooring and form a natural flow from indoors to outdoors. Hardwood decking can also be used for vertical design elements such as screens, seating, gates and fences.

Treated merbau, oak, pine, balau, etc have a natural fire resistance, stability and long service life. It is built over the natural lie of the land so it will not interfere with drainage.

Hardwood decking is easy to stain to complement an outdoor colour scheme or can be left raw to create a natural, weathered look.




户外实木 菠萝格地板 Merbau Decking

Wood species: Indonesian Merbau

Specs: natural outdoor oiled, VS anti-corrosion treatment, durable, lasting, water-proof, anti-corrosive, environmentally friendly;

Size:

2000 X 125 X 30mm
2000 X 135 X 20mm
300X300X30mm
(18mm+12mm rack, DIY)



Size:

2000X125X18mm

Carbonized Oak decking in particular is tremendously dense, rejecting water, mold, and other issues that lesser woods and decking materials would succumb to.

The cellular structure of oak makes this a perfect solution for decking material is because of the impact intensity of these fibers which rejects water, mold, and insects almost like a force field or natural body armor. And high-temperature carbonizing treatment enhances its performance further.

Finish: Natural Oil
Edge: micro-bevel, ripple surface
Joint: Nailed
Wood species: White Oak

户外橡木碳化地板 OAK DECKING(thermowood)

户外松木碳化地板 PINE DECKING(thermowood)

Size:

Length: 2000mm, 3000mm, 4000mm
Width: 95mm, 100mm, 120mm, 150mm
Thickness: 21mm, 22mm, 25mm, 28mm, 38mm, 45mm;

Carbonized wood divides into Surface charring wood and Deep carbonizing wood.

Surface charring wood:

Surface charring wood is treated by localized high temperature carbonization on the timber surface without any chemical agent.

The formation of charring wood surface can enhance the performance of timber preservation and anti biological invasion; consequently the wood owns low moisture content, stable quality, no deformation, heat insulation, insect prevention, anticorrosion, and many more advantages.

Also with its dark brown appearance, it is the ideal material for indoor and sauna bathroom, outdoor swimming pool, and other landscape applications.



Deep carbonizing wood:

Deep carbonizing wood is after 200 degrees high temperature carbonization treatment of wood, with its nutrients being destroyed, it has very good anti-corrosion mothproof physical function.

It is completely environmentally friendly without any preservatives or chemical additives. It's no poisonous smell and suitable for both indoor and outdoor. The deep carbonizing wood was originally from Europe. For example, the famous Opera de Lyon in 1997 adopted a full anticorrosive carbonizing wooden structure.



户外巴劳地板

Balau Decking

Balau is a hardwood native to southeast Asia like Indonesia, Malaysia, etc. given its durability, it is widely used within the construction industry. Over recent years it has significantly increased in popularity in Australia, Europe and America, with high end customers recognizing the attributes that make it particularly suitable for use in decking. Its colouration has also brought it to the fore of the market, as its light to mid browns and sandy red/oranges give it an eye-catching, contemporary look, particularly when wet.

Size:

19mm x 135mm x 1200-3000RL

25mm x 140mm x 1200-3000RL

300X300X30mm(18mm+12mm rack,DIY)



户外刺槐地板

Black Locust Decking

Black Locust is used extensively as a building material like flooring, wallboard, outdoor decking.

Black Locust wood can make an excellent decking material. It requires very little if any maintenance and lasts for more than 30 years without any decay. Black Locust wood is economical, durable, multi-purpose, can endure for over 100 years in the soil, many architects are using this wood to replace "Myanmar Teak" for its homologous fine grain and alike timber character.

Size:

910 X 93 X 18mm
910 X 120 X 18mm



木线条

Wood Moulding

Description:

Real wood veneer 0.3mm, blockboard/MDF core, PU lacquer, Natural color or stained colors



One piece solid oak mouldings are also available

The real wood mouldings match excellently with fine engineered wood flooring, hardwood flooring, parquet, etc. in their color tone, character, and style.



拼花地板

Art Parquet Flooring

Regular sizes:

450 X 450 X 15/2mm

600 X 600 X 15/2mm

910 X 910 X 15/2mm

Wood species:

White oak, maple, walnut, sapele, white ash, scholar tree, etc.

Regardless of where you are and what house you have, an art parquet will definitely contribute to the decoration of your house and make it more expressive and completely unique.

We are ready to offer you the widest choice from the simplest to the highly complicated decorative parquets.



QA-029



QA-088



QA-044



QA-066



QA-054



QA-095



QA-085



QA-084



QA-063




QA-094



QA-099




QA-047

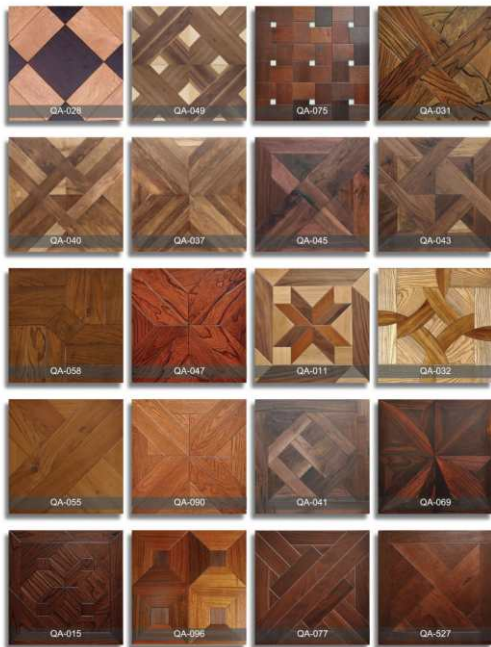

艺术边框线

Artistic Parquet Border



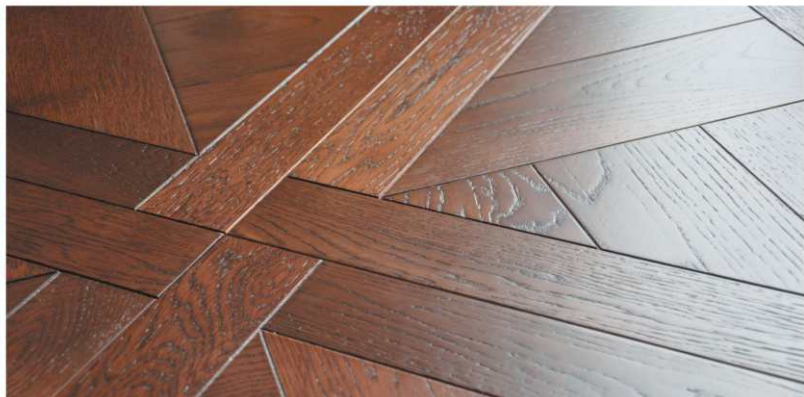

实木马赛克

Solid Wood Mosaic

Size:

300 X 300 X 4mm

Material: 100% real wood

Mounted: mesh

Surface: lacquered, oiled,
unfinished

All sizes and colors and wood
species can be customized as
per request





Wooden mosaic takes advantage of offcut and small dimension wood.

The wood species used are Santos mahogany, teak, merbau, walnut, cherry, maple, oak, cumaru, thermowood, doussie, etc.



QM-107



QM-124



QM-136



QM-122



QM-187



QM-185



QM-196




QM-184




QM-154




QM-122




QM-155



QM-123



QM-178



QM-179




QM-180




QM-133



QM-141






QM-182





QM-183



QM-157







竹地板

Bamboo Flooring

Solid bamboo flooring owns the properties of a natural appearance and silken color, which adds a unique ambience by giving warmth in the winter, coolness in the summer and an elegance which enhances value to your home or business. Bamboo Flooring is suitable for use anywhere in the home.

传统竹地板

Traditional Bamboo Flooring

Size:

980 X 98 X 10mm, 1920/960 X 96 X 15mm



重竹地板

Strand Woven Bamboo Flooring



It is made of fine bamboo strips fused together with the environmentally safe adhesive put under the extreme pressure. Strand woven bamboo is twice as hard as normal bamboo flooring.

It complies with E1 criteria manufactured to ISO 9001:2000 and CE standard.

100% Moso Strand Woven Bamboo is a high quality hardwood flooring alternative. It adds an element of luxury and intrigue to the home or workplace. With its durability, ease of care and environmental credentials, it is the natural choice for any space.

Merits:

- a) It's harder than most of other wood flooring;
- b) Its price is competitive and much cheaper than hardwood flooring;
- c) It's eco-friendly;
- d) It has plentiful resource and hardly runs out;
- e) 100% moso bamboo.



Sizes:

915 X 96 X 10mm 1850 X 96/125 X 14mm

Joint:

Tongue&groove, Click-lock



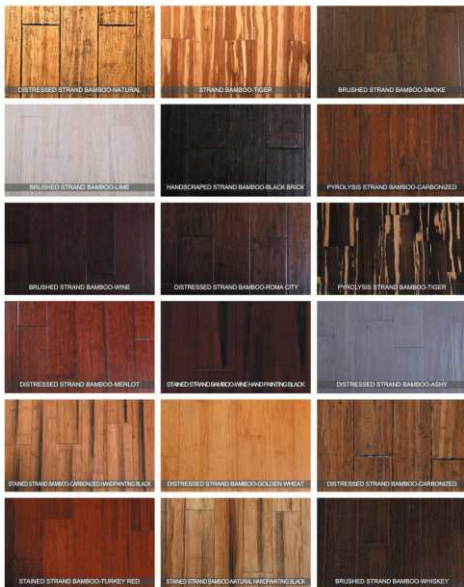

重竹 户外地板 Strand woven Bamboo Decking

Bamboo decking is made out of strand woven bamboo, and we do the oil on the decking, so it will be water proof and it can last a long time. The decking surface has different needed pattern, and customized pattern is welcomed.

Sizes:

1850 X 100 X 20/22mm
1850 X 140 X 20mm



The above photos are from the actual packing and loading for strand woven bamboo decking.
Customized package is welcomed.

TEST REPORT

Test Item	Requirement	Result
Moisture Content:	6%~15%	8.5%
Density:	$\geq 1.05\text{g/cm}^3$	1.28g/cm ³
Impact Strength:	Ball height $\geq 1\text{m}$, indentation dia $\leq 10\text{mm}$	No Indentation
Water Soak Delamination:	Length $\leq 25\text{mm}$	No Delamination
Hardness:	/	14.3kN
M.O.E.:	$\geq 4000\text{MPa}$	10180MPa
Formaldehyde Emission:	E1 $\leq 1.5\text{mg/L}$	0.3mg/L



Both ends Tongue & groove (Model:BM-CD-4)



户外重竹均采用热压成型工艺。具有耐水、不变形、不跳丝等优点。表面经过防腐剂、植物油、木蜡油等特殊处理。完全适应户外的风吹雨淋。

Outdoor strand woven decking adopts hot pressing technics and anti-corrosion formula treatment and is coated by outdoor plant oil or wood wax oil.

It has the qualities like water-proof, no deforming, no spitting, durable and long-lasting.



方形高耐 重竹户外板

DIY Square High-corrosion Strand woven Bamboo Deck

Name: excellent anticorrosion strand woven bamboo decking

Feature: Easy to install(DIY), anticorrosive, dark brown color, wide applicability
Suitable for: bathroom, swimming pool, terrace, garden, beachside, etc

Size:

300 X 300 X 26mm
(13mm plastic rack + 13mm sw bamboo deck)



竹天花板 Bamboo Ceiling

Name: Solid bamboo ceiling:

Surface: Wave style, smooth;

Color: Carbonized color, natural color, color-stained;

Finish: matt finish, UV lacquer;

Structure: Horizontal pressing;

Joint: Tongue&groove;

Back: Has ventilating groove;

Feature:

Natural, environmentally friendly, color matches
bamboo flooring or wooden flooring in the interior
room;

Easy to install, durable, can be used as wallboard,
25 years warranty;

Size:

980 X 96 X 10mm



重竹户外墙板 Strand Woven Bamboo Wall Board

Size:

1850 X 100 X 8mm

Name: excellent anticorrosion strand woven bamboo wallboard

Feature:

- 1) oiled, water proof, durable, environmentally friendly, anticorrosive, durable, years lasting;
- 2) Easy to install, nail fix or glue fix;



竹线条 Bamboo moulding



樓梯扣 Stair Nose

Carbonized color
Strand woven
1830*52*14/24mm

Carbonized color
Horizontal
1860*52*15/25mm



防角線 Scotia

Carbonized color
Strand woven
1830*18*18mm

Natural color
Strand woven
1830*18*18mm(LZ)



T型条 T-moulding

Carbonized color
Strand woven
1830*50*14mm

Carbonized color
Horizontal
1860*50*15mm



四分之一圓 Quarter round

Carbonized color
Strand woven
1830*14*14mm

Natural color
Strand woven
1860*14*15mm



踢腳線 Skirting

Carbonized color
Strand woven
1830*50/60*14mm

Carbonized color
Horizontal
1860*50/60*15mm



減邊板 Reducer

Natural color
Strand woven
1830*50*14mm

Carbonized color
Strand woven
1860*50*15mm(LZ)



門框板 Threshold

Natural color
Strand woven
1830/93/24*14mm

Carbonized color
Vertical
1900/93/24*15mm

竹制樓梯板 Bamboo Stair Tread & riser

Name: Strand woven stair tread 重竹樓梯踏板

Size: 1220 X 300 X 18/28mm 1220 X 300 X 30mm

Name: Strand woven stair rise 重竹樓梯挡板

Size: 1220 X 190 X 14mm

Name: Horizontal/vertical stair tread 普竹樓梯踏板

Size: 1220 X 300 X 18/28mm 1220 X 300 X 27mm

Name: Horizontal/vertical stair rise 普竹樓梯挡板

Size: 1220 X 190 X 15mm



地墊 Underlay

EVA underlay

We have Models:


- A) EVA foam with PE film;
- B) EVA foam with aluminium foil;
- C) EVA/IXPE foam with self adhesive;
- D) EVA foam with slot hole.

Size:

W1100 X L16900

W1100 X L 8500

T 2mm, 3mm, 4mm, 5mm, 6mm, etc.



Rubber sheet

Rubber sheet is a perfect material for flooring underlayment.
It's durable, long-lasting, Recyclable, Moisture proof and sound absorbing.

Size:

1000 X 1000 X 3mm, 4mm, 5mm, 6mm, 8mm, etc



For more details please visit:

<http://qcfloor.en.alibaba.com> qcwood.1688.com

Hongkong Qichuang Wooden Products Co., Ltd.
Room 2302, Seaview Commercial Building, 21-24
Connaught Road West, Sheung Wan, Hong Kong
香港上環干諾道西21-24号海景商业大厦二十三楼2302室

Tel: +852-28167037 ext.383

Fax: +852-28558158