



Greenvills



Hongkong Qichuang Wooden Products Co., Limited, with the headquarter in Hongkong but manufacturing base moved to mainland China since 2003, is a growing exporter of flooring products. We have two factories located in Jiashan and Panyu.

Our plants are equipped with state-of-the-art woodworking machineries like HOMAG, WEINIG, ELMAY, TIMESAVERS, introduced from Germany, Italy, Netherlands, etc. More importantly, we know it's the human who makes the production line running, our both factories have more than 800 well-trained employees, including over 50 senior engineers and technicians.

We mainly produce and export engineered wood flooring, multi-ply & 3-ply, flooring mouldings, etc. in different wood species, sizes and treatments like handscraped, distressed or smooth. We can supply you bamboo flooring as well. We have been procuring raw materials, designing and producing as well as marketing our products strictly according to ISO9001:2000 quality control system. Our factories are certified by CARB, CE and FSC.

We expect to expand our global market and work with more partners like wholesalers, distributors, project contractors, supermarkets, etc. from around the world and achieve mutually beneficial cooperation in a long run.





Merits: Drying controlled

The raw materials are dried to correct MC(moisture content) by our kiln-drier and conditioning room

Different surface effects

UV lacquer or UV oil, glossy or matt, natural or dyed color, brushed or handscrapped or carbonized are all workable



Precise processing

All the planks are flitched precisely by our state-of-the-art machinery under rigorous inspection. We can completely assure our customers the uniformity of engineered flooring in every shipment Selected material

All the top lamellas are selected and graded, with less knots, sapwoods or stains

Both square edge or bevel edge are workable, our HOMAG machinery supports the high-precision of square edge or bevel edge upon customers' requirements

Three-ply Engineered Flooring

SIZE:1860 X 148/189 X 15(4)mm

Square edge or micro-bevel;
UV(treffert) lacquered,or UV oiled;
Brushed, or unbrushed;
Middle layer: fir/pine;
Back layer: poplar;
PVAc&UF glue;
E1 standard;
Other wood species are available.

Top layer: 3mm,4mm

Middle layer:9,10mm

Base layer:2mm



- ① Oak Natural (UV oiled, brushed)
- ② Oak Natural (UV lacquered)
- ③ Oak Light (UV oiled,brushed,limed)
- ④ Oak Dark (UV oiled,brushed,limed,carbonized)



Two-ply Engineered Flooring



Top layer: 4mm

Base layer: 5, 10mm

SIZE:

490/600/700 X 70 X 10(4)mm

600/900 X 90 X 10(4)mm

Natural color;

Square edge;

UV(treffert) lacquered;

Birch-plywood;

Phenolic&EPI glue;

E0 standard.

- ① Doussie
- ② Burma Teak
- ③ Iroko
- ④ Oak
- ⑤ Walnut



Bamboo Flooring

SIZE:

960 X 96 X 15/10mm

1830 X 96 X 14mm

Customized size is acceptable;

micro-bevel;

UV lacquered;

UF glue(KOYO,OSHIKAWA,etc.);

E1 standard;

Strand-woven
(SW)

Vertical
(VT)

Horizontal
(HZ)



1

2

3

①SW Carbonized

②SW Natural

③SW Tigerskin

④VT Carbonized

⑤VT Natural

⑥HZ Carbonized

⑦HZ Natural

4

5

6

7



Multi-ply Engineered Flooring

Top layer:
2mm,3mm,4mm

Multi-layer:8-13mm

SIZE:

1200RL X 90/125 X 12/15mm

1200RL X 76 X 12mm

Customized size is acceptable;
Micro-bevel;
UV(treffert) lacquered,or UV oiled;
Brushed or handscraped is workable;
UF or MF glue;
E1 standard;

① Maple ② Birch ③ AM Walnut ④ Chinese walnut ⑤ Hickory
⑥ Meranti ⑦ Jatoba ⑧ White Oak ⑨ Elm



Solid Wood Flooring

SIZE:

610/760/910 X 95/125 X 18mm

100%
Real Hardwood

Customized size is acceptable;
Micro-bevel;
UV lacquered,or UV oiled;
E1 standard;
Other wood species:Oak,Maple,
Balsamo,Curnaru,Acacia,etc

① Ash

② BurmaTeak



DECKING

SIZE:

1850 X 120 X 20mm
2000RL X 125 X 18mm

Customized size is acceptable;
Solid bamboo/wood;
Micro-bevel;
OSMO Oil;
Carbonized bamboo/wood;




ACCESSORIES



Name	Size(mm)	Specs
T-moulding	2400X50.8X14	real wood veneer,natural color or stained MDF core E1 density 750pa
Stair nose	2400X90X12/18	
Reducer	2400X50.8X8-15	
Threshold	2400X54X14-21	
Skirting	2400X90X12	
1/4 round	2400X18X12	



Cork sheet / Cork Roll are very durable materials for flooring underlayment, it's sound absorbing, life-long lasting, environmentally friendly, and natural. 915x610x4-6mm, 50-75pcs per box; Density:210-270kgs/m³;

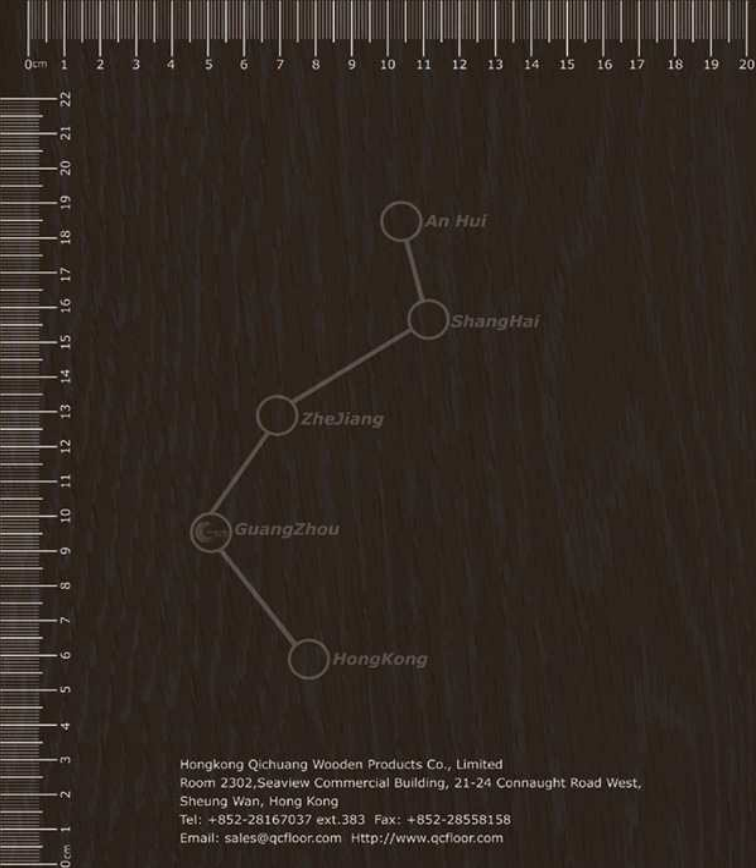

Hongkong Qichuang Wooden Products Co., Limited
Room 2302, Seaview Commercial Building, 21-24 Connaught Road West,
Sheung Wan, Hong Kong
Tel: +852-28167037 ext.383 Fax: +852-28558158
Email: sales@qcfloor.com [Http://www.qcfloor.com](http://www.qcfloor.com)